

ICH INTERLOC - AECW CUTTERHEADS

* Assemblies with shanks, extensions and reducers *

"INTERLOC DRIVE SYSTEM"

NEW!

High Performance Aluminum Cutters




CUTTING STLYE
Face Milling, Shoulder Cutting, Grooving, & Pocket Cutting
APPLICATIONS
Roughing, Semi-finishing, & Finishing




INTERLOC CUTTERHEAD INSERT STYLE

ICH-100AEC-2

CUTTING DIAMETER NUMBER OF FLUTES

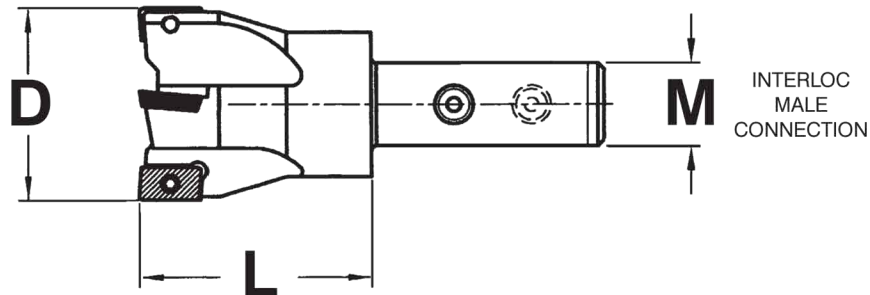

★ REF. SPEED & FEED
2,000 CUTTING DIAMETER 3 FLUTE
3,000 R.P.M.
.200 DEPTH OF CUT
300 I.P.M.

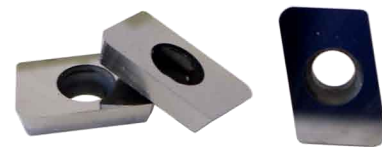

- ❖ Cooling through shanks available
- ◆ Custom sizes available

AECW INSERTS				
CATALOG NUMBER	WIDTH (W)	LENGTH (L)	RADIUS (R)	AVAILABLE GRADES
AECW-422	0.360	0.625	0.0312	TI-8J
AECW-424			0.0625	
AECW-428			0.1250	

CATALOG NUMBER	INTERLOC MALE CONNECTION (M)	EFFECTIVE CUTTING DIAM. (D)	LENGTH (L)	NUMBER OF FLUTES	INSERT NUMBER	LOCK SCREW #	TORX WRENCH #
ICH-100AEC-2	M100 INTERLOC	1.000	1.500	2	AECW-432 TO	TS-10I	T-15
ICH-125AEC-2	M125 INTERLOC	1.250		3	AECW-438		
ICH-200AEC-3	M200 INTERLOC	2.000					



(586) 739-7760 Fax (586) 739-7769

THP - AECW SHELL MILL CUTTERS

* Assembles with facemill extensions *

"INTERLOC DRIVE SYSTEM"



NEW!

High Performance Aluminum Cutters


CUTTING STYLE
Face Milling, Shoulder Cutting, Grooving, & Pocket Cutting
APPLICATIONS
Roughing, Semi-finishing, & Finishing



INTERLOC CUTTERHEAD
INSERT STYLE
THP-300AEC-5
CUTTING DIAMETER
NUMBER OF FLUTES

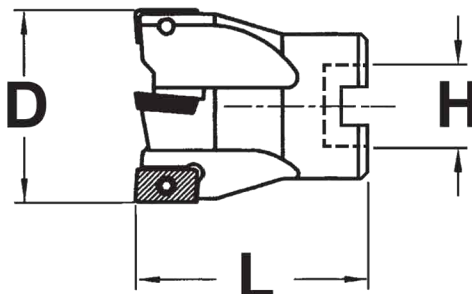

★ REF. SPEED & FEED
2,000 CUTTING DIAMETER 3 FLUTE
3,000 R.P.M.
.200 DEPTH OF CUT
300 I.P.M.

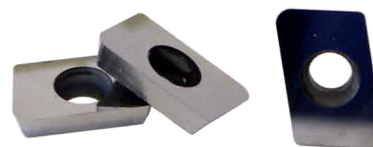

- ❖ Cooling through available
- ◆ Custom sizes available

AECW INSERTS				
CATALOG NUMBER	WIDTH (W)	LENGTH (L)	RADIUS (R)	AVAILABLE GRADES
AECW-422	0.360	0.625	0.0312	TI-8J
AECW-424			0.0625	
AECW-428			0.1250	

CATALOG NUMBER	EFFECTIVE CUTTING DIAM. (D)	HOLE DIAMETER (H)	LENGTH (L)	NUMBER OF FLUTES	INSERT NUMBER	LOCK SCREW #	TORX WRENCH #
THP-300AEC-5	3.000	1.250	2.500	5	AECW-432 TO	TS-10I	T-15
THP-400AEC-5	4.000	1.500		6	AECW-438		
THP-400AEC-6							



(586) 739-7760 Fax (586) 739-7769

INDEXABLE INSERTS

AECW INSERT



AECW INSERTS				
CATALOG NUMBER	WIDTH (W)	LENGTH (L)	RADIUS (R)	AVAILABLE GRADES
AECW-432	0.360	0.625	0.0312	TI-8J
AECW-434			0.0625	
AECW-438			0.1250	